


DORSEY STANDARD DIAL INDICATING UNIT

TECHNICAL SPECIFICATIONS

Dorsey offers an integrated indicator housing for just about any application.

DIAL UNIT HOUSINGS					
DIM.	AGD 1	SMALL AGD2	STANDARD AGD 2	HEAVY DUTY AGD 2 HD	1" SHAFT AGD 3
A	1.90"	2.25"	2.25"	2.25"	2.75"
B	.38"	.50"	.62"	1.00"	1.00"
C	3.50"	4.25"	5.25"	6.12"	6.5"
D	2.42"	2.40"	3.16"	3.66"	3.81"
E	1.50"	1.30"	1.90"	2.40"	2.45"
F	1.00"	1.10"	1.50"	2.00"	2.00"
G	.36"	.60"	.84"	1.13"	1.06"
H	.50"	.50"	.84"	.88"	1.19"
J	.56"	.88"	1.06"	1.44"	1.44"
K	.91"	2.00"	2.20"	3.00"	3.00"

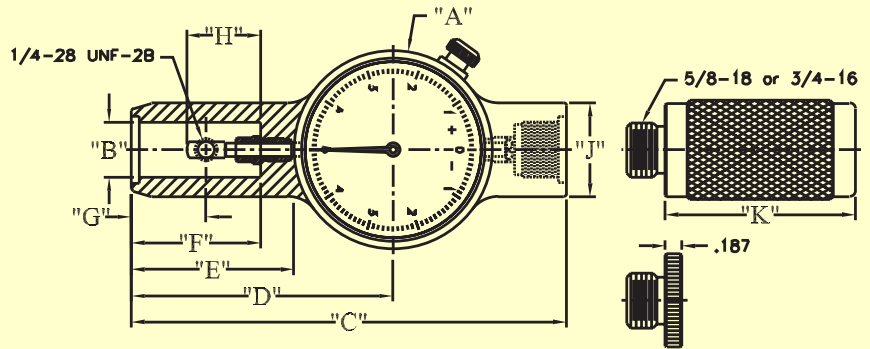

INDICATOR HOUSING OPTIONS



For .312" dia. shaft
Part # Example:
DS-1DM025-01
Only available for 1DM
indicators

For .500" dia. shaft
Part # Example:
DS-2150-01-05

For .625" dia. shaft
Part # Example:
DS-2150-01
Standard unit
(no charge)

For .625" dia shaft
Part # Example:
DS-2DM025-01

For 1" dia. shaft
Part # Example:
DS-2150-01-10

Digital or independant
dial indicator housing



Dorsey Metrology International
Website: www.dorseyMetrology.com

A-11

Proudly made in the USA



Tel: (845) 454-3111 Fax: (845) 454-3888
53 Oakley Street, Poughkeepsie, NY 12601