



ULTRA HIGH AMPLIFICATION GROUP 3

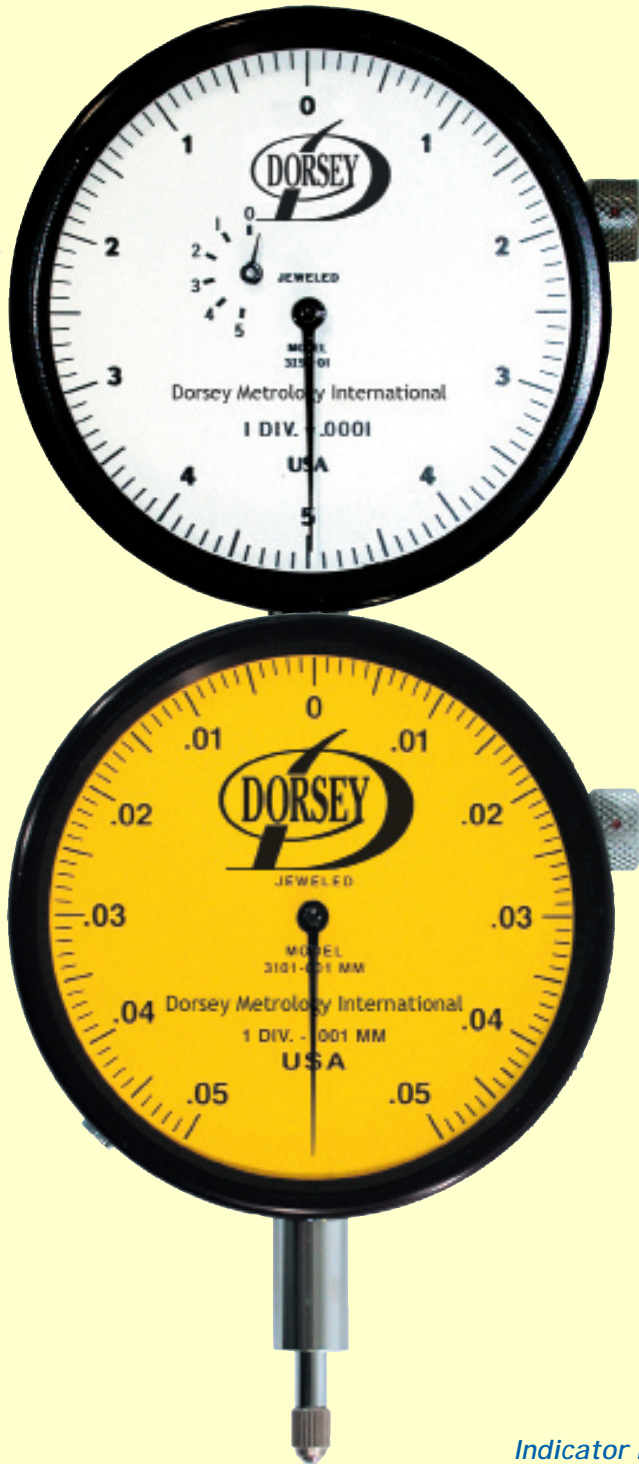


FEATURES:

- High amplification movement - graduations as fine as .00005". Improved readability and minimizes judgement error.
- Lever principle of amplification - minimizes effect of spindle sideshake. Linearity and repeatability maintained through millions of cycles.
- 2-15/16" Bezel - fits many existing fixtures. Conforms to ANSI/AGD standards.
- Adjustable gaging force - easily adjusts from 2 to 5 ounces by externally accessible screw.
- External zero adjustment knob makes possible the advantage of adjusting indicator hand to zero rather than rotating bezel to 'zero' hand.
- Optional lifting lever or cable release. Use lifting lever only when indicator is back mounted. Cable release may be used when indicator is back or stem mounted and enhances stability of gaging setup.
- Optional tolerance hands - accommodates tolerance hands to facilitate production gaging.

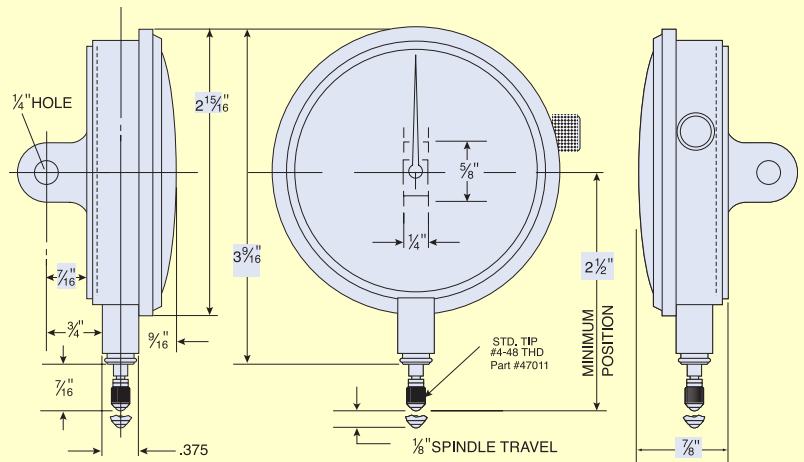

Indicator back options for Group 3 & 4

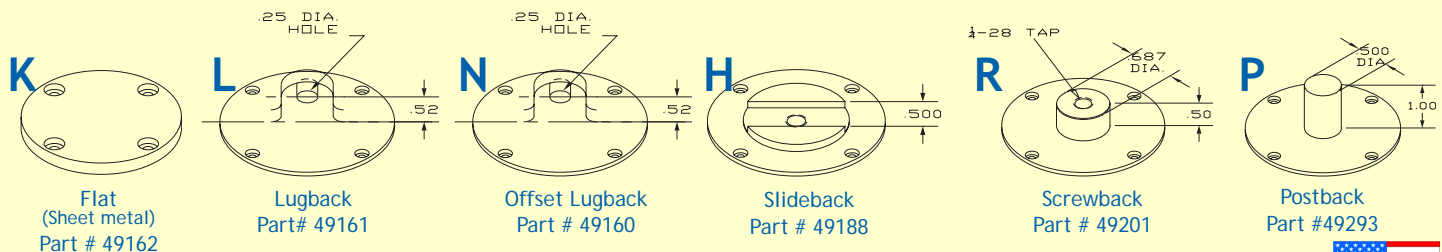

See page A-12 for dial face options, A-13 for accessories and contacts

Proudly made in the USA

