

S3 COMPARATOR STAND


The S-3 precision comparator stand was designed for manufacturing areas requiring high accuracy, such as grinding and inspection departments. It is recommended for use with all Dorsey high amplification dial and digital indicators, but it will also accommodate other gaging devices having a standard .375" or 8mm diameter mounting stem.

The maximum gaging height is 8.5" as standard and the throat clearance is 3.13"

FEATURES:


- Unique fine adjustment head -- Dorsey's frictionless reed spring design prevents backlash and drifting. Insures rapid, precise zero positioning of any dial indicator. Permits Dorsey high amplification dial indicators or other gaging instruments of equal sensitivity to perform to their full capability of measuring to millionths of an inch repetitively and accurately.
- Rugged construction -- provides maximum gaging stability permitting measurements in millionths
- Ground and chrome plated columns provide maximum wear and corrosion resistance
- Precision machined cast base and anvil supports -- insures perpendicularity of column to anvil
- Selection of hardened and lapped anvils -- increases the capability of the stands to accommodate many part configurations

PART #	DESCRIPTION
47405	S3 STAND WITHOUT ANVIL
S3-HEAD	S3 FINE ADJUSTMENT HEAD ONLY

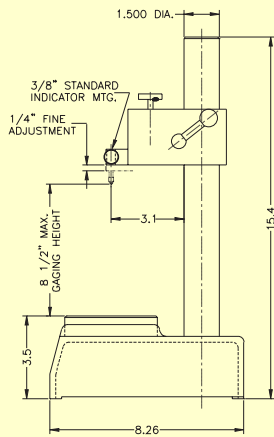


Shown with optional #414-002 indicator and cable release

Hand Lapped Anvils:




Part# 47402

Thin serration and flat reversible anvil



Part# 47403

Rail type anvil 1.25" x 3.88"



Part# 47404

Wide serration and flat reversible anvil



Dorsey Metrology International
Website: www.dorseymetrology.com

B-6

Proudly made in the USA



Tel: (845) 454-3111 Fax: (845) 454-3888
53 Oakley Street, Poughkeepsie, NY 12601