



# GROUP 2 ULTRA HIGH AMPLIFICATION

Dials can be supplied to your specification. See page 15 for options.

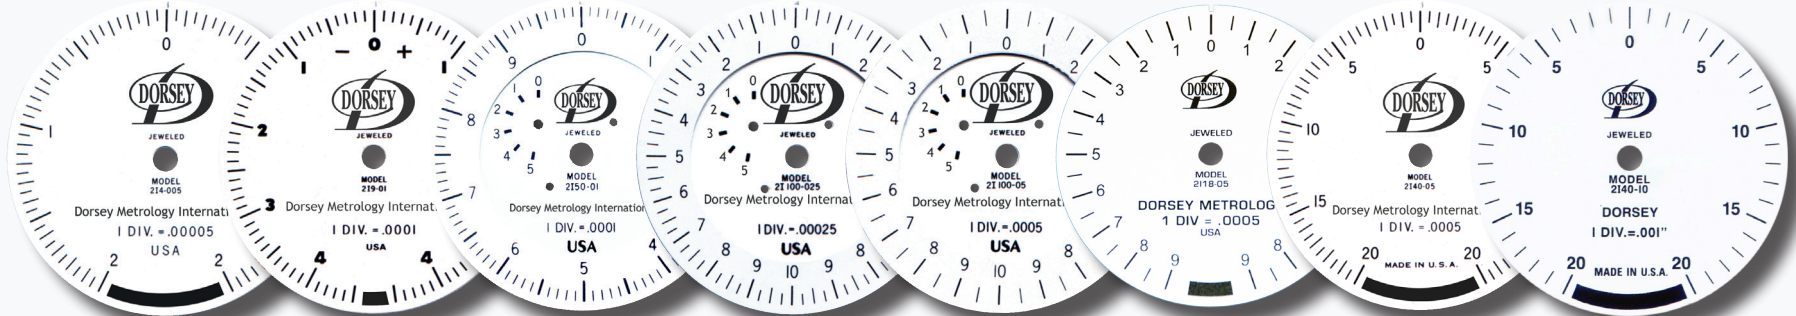

MODEL	214-005	219-01	2150-01	21100-025	21100-05	2118-05	2140-05	2140-10
Graduation	.00005"	.0001"	.0001"	.00025"	.0005"	.0005"	.0005"	.001"
Total Travel	.004"	.009"	.050"	.100"	.100"	.018"	.040"	.040"
Dial	.002"-0-.002"	.0045"-0-.0045"	0-.005"-0	0-.10"-0	0-.10"-0	.009"-0-.009"	.020"-0-.020"	.020"-0-.020"
Revolutions	1 Rev.	1 Rev.	5 Rev.	5 Rev.	5 Rev.	1 Rev.	1 Rev.	1 Rev.
Accuracy	+/- .00005"	+/- .0001"	+/- .0001"	+/- .00025"	+/- .0005"	+/- .0005"	+/- .0005"	+/- .0005"
Repeatability	+/- .00001"	+/- .00002"	+/- .00002"	+/- .00005"	+/- .0001"	+/- .0001"	+/- .0001"	+/- .0001"

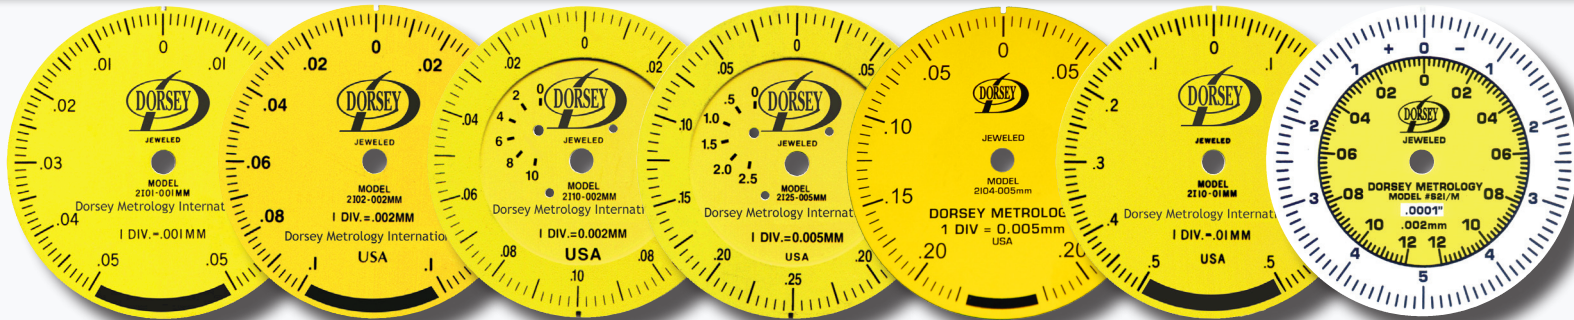

MODEL	2101-001mm	2102-002mm	2110-002mm	2125-005mm	2104-005mm	2110-01mm	S21/M
Graduation	0.001mm	0.002mm	0.002mm	0.005mm	0.005mm	0.01mm	0001" (0.002mm)
Total Travel	0.1mm	0.2mm	1.0mm	2.5mm	0.4mm	1.0mm	.010" / 0.25mm
Dial	0.05-0-0.05mm	0.1-0-0.1mm	0-.1mm-0	0-.25mm-0	0.2-0-0.2mm	0.5-0-0.5mm	0-.005"-0
Revolutions	1 Rev.	1 Rev.	5 Rev.	5 Rev.	1 Rev.	1 Rev.	1 Rev.
Accuracy	+/- 0.001mm	+/- 0.002mm	+/- 0.002mm	+/- 0.005mm	+/- 0.005mm	+/- 0.01mm	+/- .0001" (0.002mm)
Repeatability	+/- 0.0002mm	+/- 0.0004mm	+/- 0.0004mm	+/- 0.001mm	+/- 0.001mm	+/- 0.002mm	+/- .00002" (.0005mm)



For extended indicator stem of 3 inches add D4- as prefix. Example: D4-2150-01

ACCESSORIES	AGD 2 PART #
Bottom Mounted Lifting Lever	49341
Top Mounted Lifting Lever	49340
Tolerance Hands	49255
Special Shaded Dials	As Quoted



For perpendicular indicator add -90 as suffix. Example: 2101-001mm-90