




FEATURES:

- ✔ Available with ISO 17025 certification.
- ✔ High amplification movement - graduations as fine as .00005". Improves readability and minimizes judgement error.
- ✔ Lever principle of amplification - minimizes effect of spindle sideshake. Linearity and repeatability maintained through millions of cycles.
- ✔ 2-15/16" Bezel - fits many existing fixtures. Conforms to ANSI/AGD standards.
- ✔ Adjustable gaging force - easily adjusts from 2 to 5 ounces by externally accessible screw.
- ✔ External zero adjustment knob makes possible the advantage of adjusting indicator hand to zero rather than rotating bezel to 'zero' hand.
- ✔ Optional lifting lever or cable release. Use lifting lever only when indicator is back mounted. Cable release may be used when indicator is back or stem mounted and enhances stability of gaging setup.
- ✔ Optional tolerance hands or shaded dials to facilitate production gaging.

See page 15 accessories and contacts options

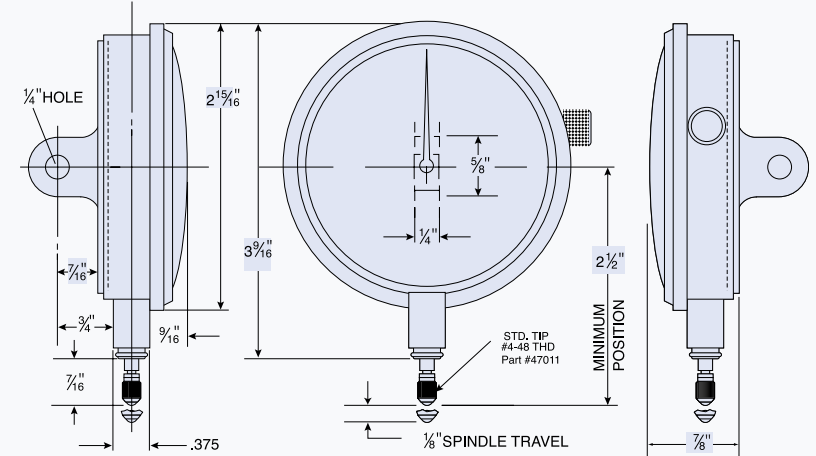

Indicator back options for Group 3 & 4

